


CIRCUIT BREAKER 60-2

Pyrotechnic circuit breaker for low-voltage applications

- Prevents fires caused by short circuits and protects the electric system
- Provides irreversible secure separation over full current range
- Low internal resistance
- High insulation resistance after activation
- Lightweight design at small formfactor
- Weldable busbar connection possible

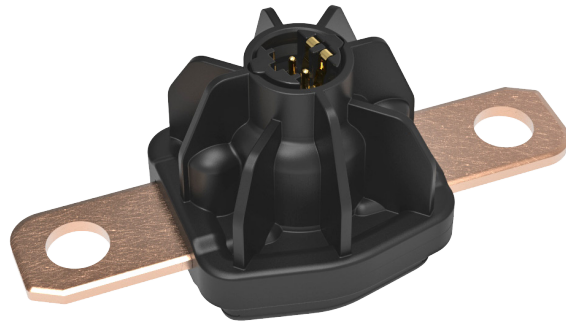

Key functional parameters

Separation capacity (voltage current inductance)	60 V 2 kA 15 μ H (higher/alternative values on request)
Separation time	< 2 ms (typical < 1 ms)
Operating temperature	-40 °C to +120 °C*
Ambient temperature	-40 °C to +85 °C
Product lifetime	15 years**
Qualification	in accordance with LV 123 and LV 124
Weight	~ 50 g

*for a limited time interval

**operating hours depending on temperature collective & activation energy

HV connection (busbar)

Busbar - igniter - insulation resistance	> 50 M Ω (before and after activation)
Busbar resistance	\leq 90 μ Ω (before activation) > 50 M Ω (after activation)
Busbar material	Copper, copper + Ni/Sn plating (alternatives on request)
Busbar cross-section area	16 mm \times 2 mm
Intended type of connection	screwing (M8)/welding
Distance between screw holes	64 mm

LV connection (igniter)

Terminal type	Pin type (2 pins), gold-coated
11 mm Squib-Interface (unsealed)	AK-1/AK-2/ABX-5 following ISO 19072-1
Pyrotechnics	GTMS igniter (LV16 & USCAR-28), maximum pyrotechnic mass 48 mg
Igniter resistance	2.1 Ω \pm 0.4 Ω
Igniter parameter "No fire"	\leq 0.4 A \leq 5 A for \leq 4 μ s
Igniter parameter "All fire"	1.75 A to 40 A for 0.5 ms \geq 1.2 A for \leq 2 ms


Current carrying capacity*

Ambient temperature	Current	Duration
+85 °C	250 A	continuous


*depending on cooling, convection, cross-section, contact surface etc. (thermal model upon request)

Typical curves

Typical current i and voltage u curves


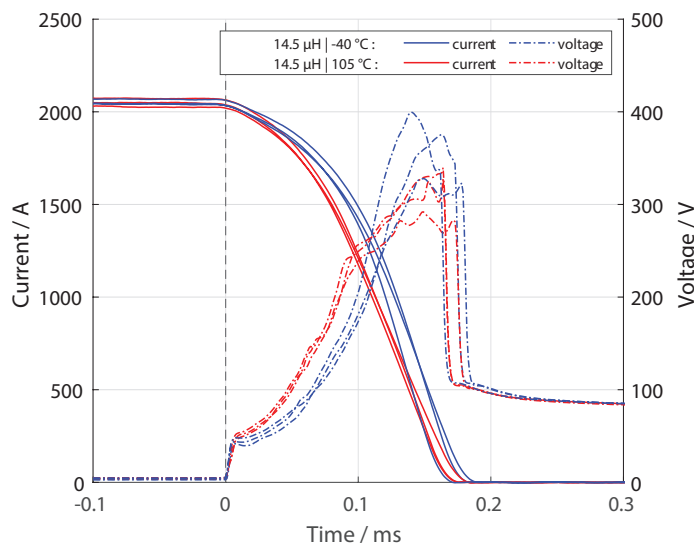


Estimated maximum switching capacity

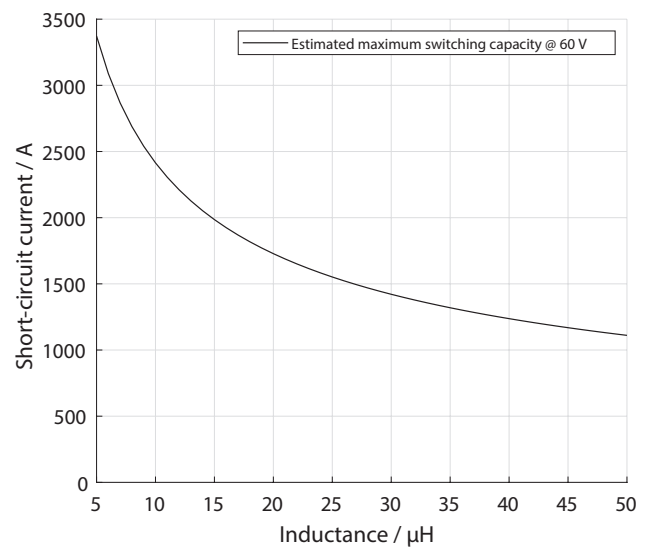

Outline dimensions*

*in mm

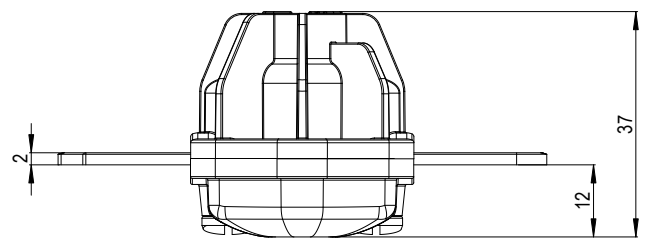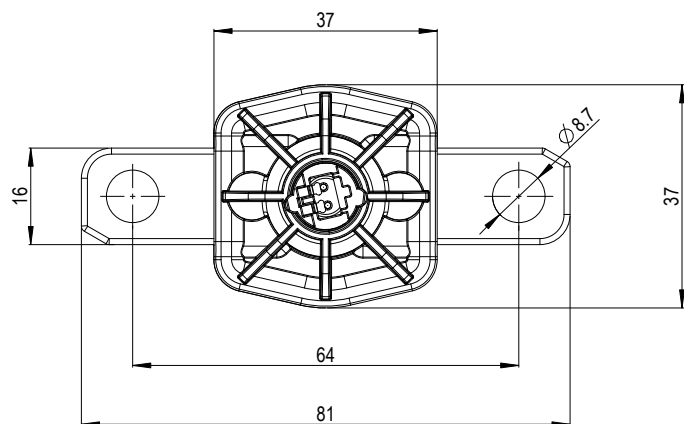

version: August 2022

